

 **JABŁOŃSKI**  
parkiety od 1992





Established in 1992 by Sylwester Jabłoński, Parkiety Jabłoński is the quintessence of a family passion for wood spanning over 140 years. By combining rich knowledge and experience, we have built a company that has been providing top-quality solid wood flooring for over three decades.

Our offer includes planks, parquet flooring, chevron 45°, chevron 60°, and classic herringbone 90° flooring in oak, which captivates with its quality and natural appearance.

We also specialize in solid decorative floor patterns made from numerous wood species. Innovation, continuous development, and consistently high standards are at the heart of our company, as evidenced by the obtained certifications and ongoing collaboration with research centers in Poland.

Thanks to constant investments in new technologies and attention to every detail, Parkiety Jabłoński enjoys an enduring reputation in the market. However, we don't stand still and boldly plan further steps in our development.

# Oak Floors – The Choice for Years

At Parkiety Jabłoński, we focus on durable, aesthetic materials that give floors a natural and authentic look. Oak floors have beautiful and elegant grain patterns. The classic wood color adds warmth and natural energy to interiors. The key functional characteristic of oak is its hardness and mechanical strength.

Therefore, by choosing oak floors, we opt for a material that is stable, durable, and can last for many years. Our range includes both pre-finished products: with lacquer or oil, as well as unfinished ones.



For more detailed information, please refer to the technical data sheets of the products on our website:

[parkietyjablonski.pl](http://parkietyjablonski.pl)

**Nature Grade** - If you value simplicity and subtle elegance, this class is for you.

Oak flooring in the Nature grade is a classic, timeless solution that fits seamlessly into practically any interior, captivating with its natural character.

It is distinguished by subdued colors and lack of knots, offering a consistent and harmonious character.





**Rustic Grade** - It is more varied in terms of color and pattern than the two previous classes. For those who want to emphasize the raw, natural character of their interior, the Rustic grade is the ideal choice.

This grade highlights everything that is most authentic and untamed in oak wood structure. Knots and distinct color transitions visually marked through years, tell the story of the tree, where and how it grew. By choosing Rustic, you opt for a floor with soul, adding unique character and depth to interiors.




# Oak Flooring for Underfloor Heating

Throughout years of experience in thermal modification of wood, we have created a safe, ecological product ideal for underfloor heating systems. The wood color has been subtly darkened, maintaining a similar shade to natural oak.

A key element is the unique thermal wood treatment process developed by our company in collaboration with the Wood Technology Department at the Warsaw University of Life Sciences.

Our innovative solid oak products have successfully undergone months of testing at the Polish Building Research Institute (Instytut Techniki Budowlanej), obtaining full approval for use in underfloor heating.

One of the main advantages of our solid floors designed for underfloor heating is their eco-friendly character. In the thermal treatment process, we use only high temperature and steam, without any chemical agents. As a result, our product is completely natural and environmentally friendly.



FLOOR  
HEATING





**Nature Grade** - Products from thermally modified oak in the Nature grade are characterized by an elegant and dignified appearance.

As the name suggests, they have a natural pattern - wood grain and the characteristic color of oak, while maintaining an increased tonal range typical for thermally modified wood.

The selection in the Nature class is very strict, eliminating defects that could negatively affect the appearance, lifespan, or durability of the boards. This is an ideal choice for lovers of the natural beauty of wood who value harmony and delicacy in flooring.



**Rustic Grade** - It showcases the authenticity and untamed structure of wood.

Diverse patterns and small knots are not only visual elements but also a narrative about the history of the tree, its growth conditions, and life.

These subtle details create a unique floor that not only emphasizes the raw character of the interior but also adds natural beauty and warmth.







JABŁOŃSKI  
parkiety od 1992





# Flooria®

Solid Finish, natural beauty

On September 30, 2010, the Flooria trademark was created and registered, representing one of the main product lines in our offer.

Flooria products by Parkiety Jabłoński feature a **surface coated with UV lacquer or natural oil**, with a four-sided bevel.

For many years, Flooria line products have been the most popular among our customers. What sets them apart? Their natural timeless character, high quality, variety of colors and dimensions available in the offer, as well as ease of installation and short assembly time.

Over time, the range of products in this line has been technically improved, expanded with new forms and types of finishes, all to keep up with trends and meet market requirements. Our products are backed by passion, experience gained over many years, and the latest technologies.

Therefore, each Flooria board leaving our production line is marked with a product logo to provide customers with confirmation of product authenticity and quality assurance.



---

### Beveling

Every factory-finished floor has visible top-cut edges (micro-bevels).

Our proprietary bevel has a 28° angle to facilitate cleaning and give a subtler appearance to the floor.



---

### Brushing

In most of our floors, brushing is an additional, optional service that allows the floor to reach a distinctive appearance.

It involves brushing soft parts of the wood out of the surface of the board, giving it a noticeable tactile structure. Brushing is often referred to as wood aging.

It can be performed on products finished with both UV lacquer and oil waxes.

**(Topaz and Caramel colors achieve their unique appearance through brushing).**






---

### Filling

It is a process of filling all defects in the boards resulting from the anatomical structure of the wood or arising during the production process.

This procedure is mainly used for Rustic grade. Precise and careful filling allows for achieving an attractive appearance of the finished product while preserving its natural character and charm.

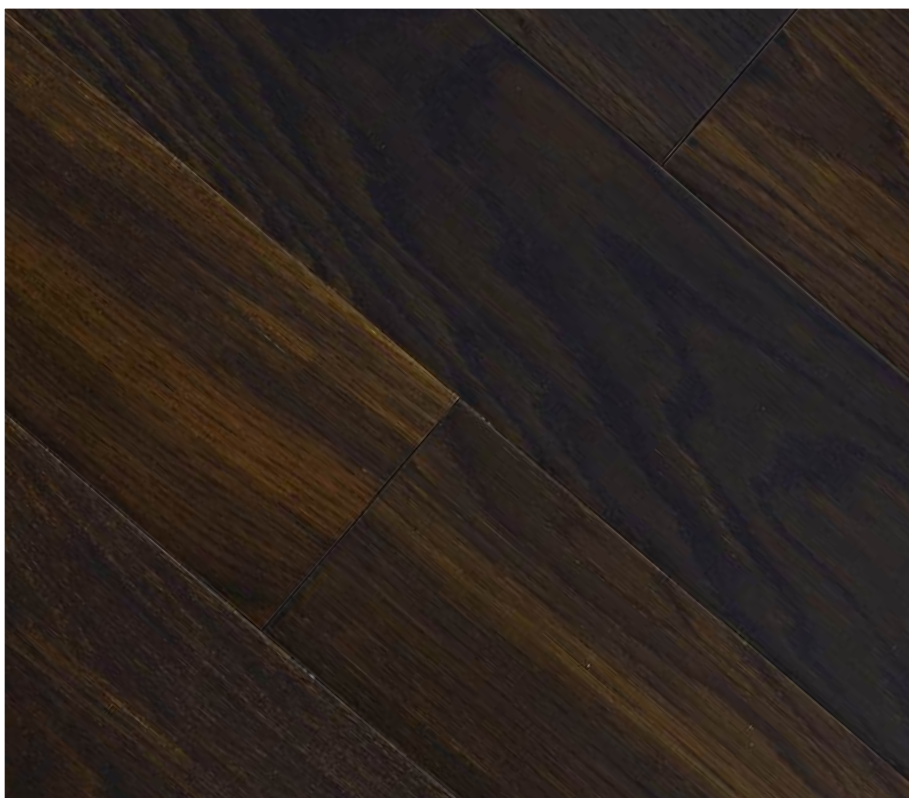

---

### Ammoniating

It is an innovative wood modification method that gives it a deep, black color throughout its slice and improves its resistance.

This process leads to natural darkening of the wood and strengthens its structure. The final product is often called black oak.

# Flooria Lacquered Floors

We apply UV lacquer in 7 layers, allowing it to cover the wood pores, giving the entire surface an exclusive, glossy appearance, and ensuring smoothness.

Our UV lacquer is practically solvent-free and applied in a closed loop, making it an environmentally friendly product.


Finished boards have a thickness of 15 or 20 mm.



**Lacquered floors** are most often preferred by customers attached to traditional solutions.

In our offer, lacquer finishes come in two variants:

- **satin** - giving the floor a shine that beautifully reflects light, adding a delicate glow and elegance to interiors
- **matte** - soft, emphasizing the natural look of wood, adding warmth and coziness to interiors

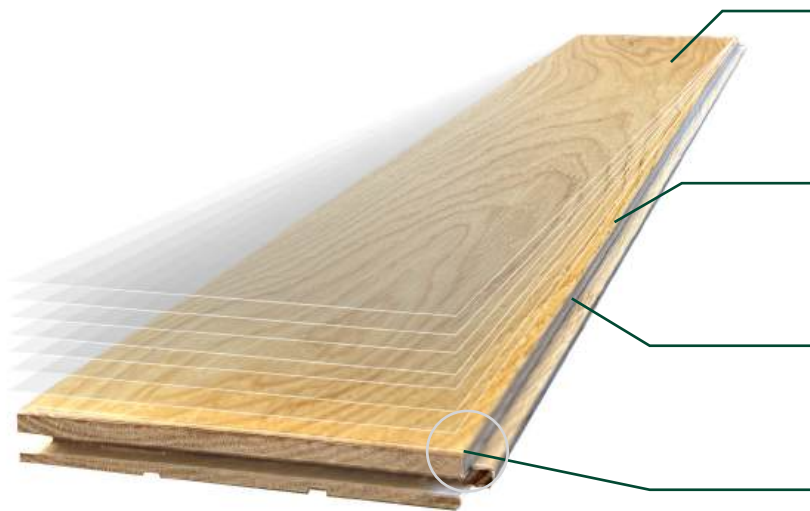



7 layers of  
UV lacquer

high resistance  
2 component base coat

solid wood floorboard  
20 or 15 mm thick

4 side microbevel  
1,0 x 0,5 mm

- There are 8 different UV lacquer colors available, perfectly matching any interior, providing a wide selection to suit individual aesthetic preferences.
- It is worth noting that wood protected by lacquer is highly resistant to abrasion. As a result, the floor becomes much more resistant to aging processes and does not require frequent maintenance or renovation.

- Due to the comprehensive coverage of the surface with lacquer, floors are more resistant to dirt, as stains do not penetrate the wood structure.
- Floors covered with a lacquer coating have high resistance to direct water exposure.

# Flooria Oiled Floors


Another finishing method we use is surface oiling. By applying two or three layers of oil and additionally protecting them with wax, we achieve the desired natural appearance and high durability.

Natural oil waxes penetrate the wood, leaving a smooth film on its surface, facilitating usability.

They allow for easy spot repairs without the need to sand the entire floor. In our production we use child-safe and eco-friendly finishing products.

Finished boards have a thickness of 15 or 20 mm.

- The main positive feature of oiled boards is that oils enhance the wood color while still maintaining its natural appearance, highlighting the grain.
- Oil is very pleasant to the touch, does not generate static electricity, or attract dust, and its coating has a gentle sheen.

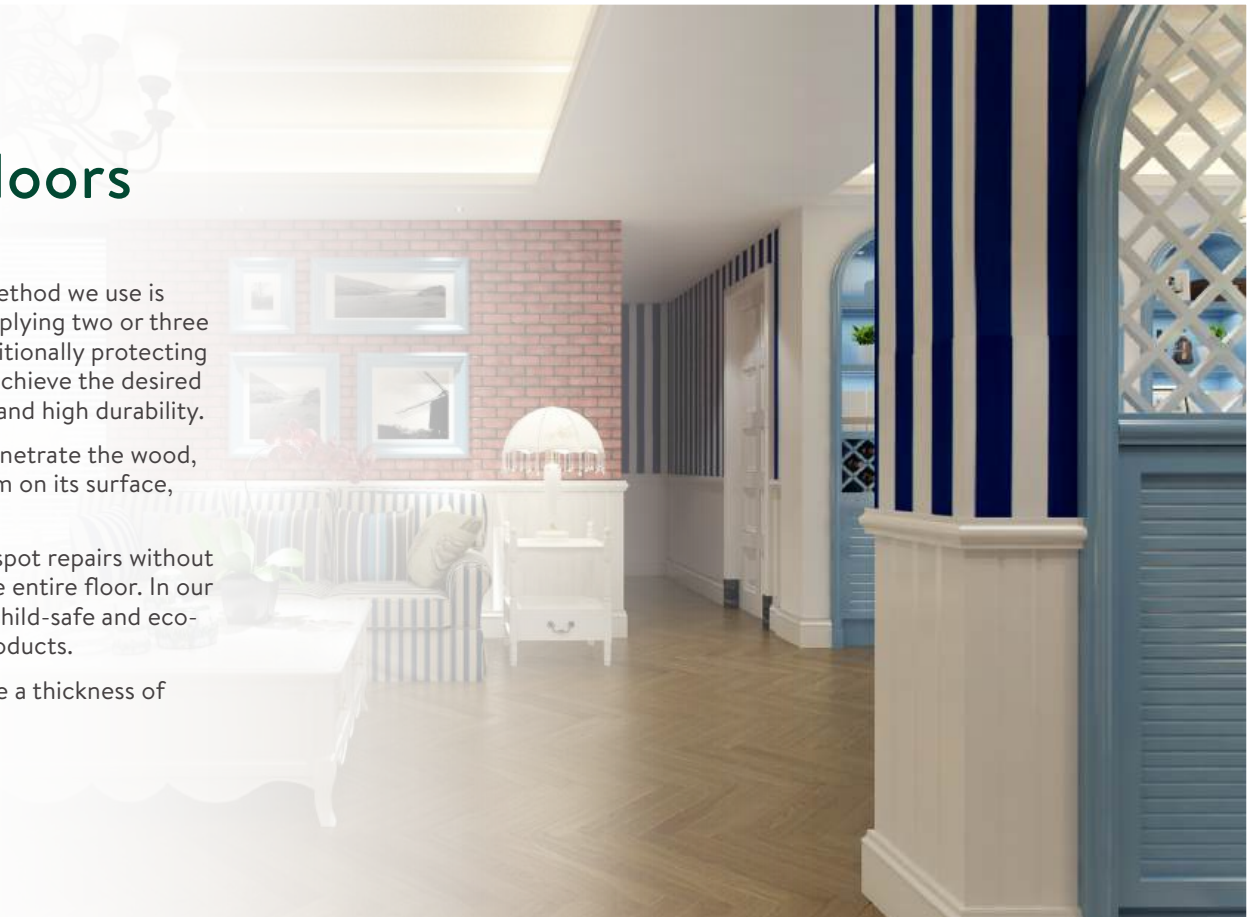



protective top  
coat layer

transparent  
or coloured base  
coat layer

wooden board  
solid thickness  
20 or 15 mm

4 side microbevel  
1,0 x 0,5 mm

- Another advantage of oiled floors is their ease of repair. To renew the surface, simply apply another layer of oil without the need for sanding the entire surface. Minor scratches can be easily removed through regular maintenance procedures.





Lacquered



Oiled



**Alabaster**



**Atacama**



**Transparent**



**White**

Lacquered

Oiled


Caramel



Walnut



Sonora



Transparent




Topaz













**THICKNESS**  
raw/finished



**WIDTH**



**LENGTH**

	THICKNESS raw/finished	WIDTH	LENGTH
<b>Oak board</b>	16 -15 mm / 21 - 20 mm	100 mm	400-2,000 mm
		130 mm	400-2,000 mm
		150 mm	600-2,000 mm
<b>Prestige oak line</b>	16 -15 mm / 21 - 20 mm	130 mm	800-2,600 mm
		150 mm	800-2,600 mm
		180 mm	800-2,600 mm
<b>Oak board with underfloor heating</b>	16 -15 mm	100 mm	400-2,000 mm
		130 mm	600-2,000 mm
		150 mm	600-2,000 mm













# Classic Herringbone

Floors laid in herringbone patterns have noticeably gained popularity in recent years. This is a nod to classic elegance and a departure from the ongoing trend of boards laid lengthwise.

For a floor to be laid in a chevron 45° pattern, it must meet two criteria – all elements must be of the same length and must have a right-left tongue-and-groove arrangement.

The advantage of such floor layout is greater wood work compensation compared to longitudinal layout.


Depending on the angle of cut among herringbones, we distinguish: Classic (90°), Chevron (45°), and Chevron (60°).





Classic herringbone 90°




Classic double herringbone 90°

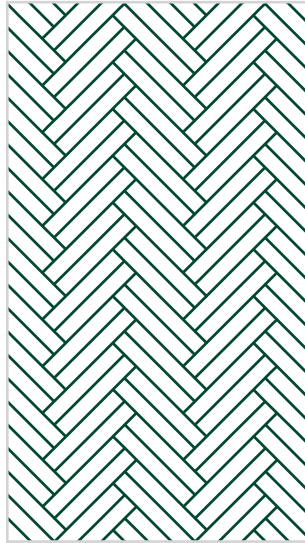


Classic triple herringbone 90°

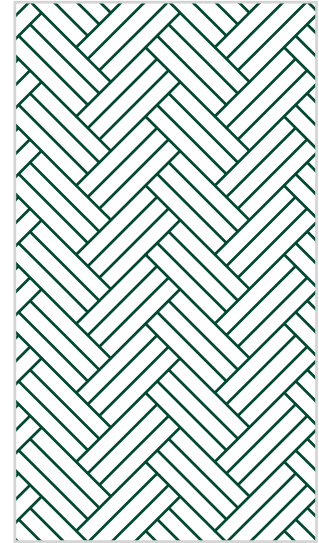

**THICKNESS**  
raw/finished



**WIDTH**



**LENGTH**

**Classic herringbone 90°  
/ Parquet - Oak**

16 -15 mm /  
21 - 20 mm

70 mm	300/350/420/500/600/800/1,000/1,200 mm
100 mm	400/500/600/800/1,000 mm
130 mm	400/500/600/800/1,000 mm
150 mm	500/600/800/1,000 mm

**Classic herringbone 90°  
/ Parquet - Oak  
for heating floors**

16 -15 mm

70 mm	500/600/800 mm
100 mm	400/500/600/800/1,000 mm
130 mm	400/500/600/800/1,000 mm
150 mm	500/600/800/1,000 mm





# Chevron


Chevron is a product that has stormed the flooring market. Formerly used in palaces and exclusive apartments, it is now found in almost every type of interior. To create this floor, boards are cut at a 45° angle. It suits classic, industrial, as well as modern interiors, adding elegance while being very versatile in terms of matching other decor elements. All of this translates into a long-lasting trend for chevrons 45°.

Chevron 60° is a sister product to Chevron 45°, differing in the cutting angle. It is less known, making it an ideal choice for customers seeking a floor with a distinctive look, standing out from popular boards and chevrons 60°. It will work in interiors of any style, serving as a base for various types of arrangements.


If you are looking for a chevron with a different angle or would like to learn more about available dimensions, write to us! Thanks to our innovative production method, we have no limitations on producing very long elements or unusual cutting angles.





Chevron 45°

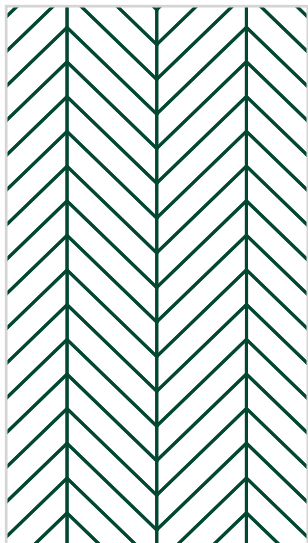


Chevron 45° Wave

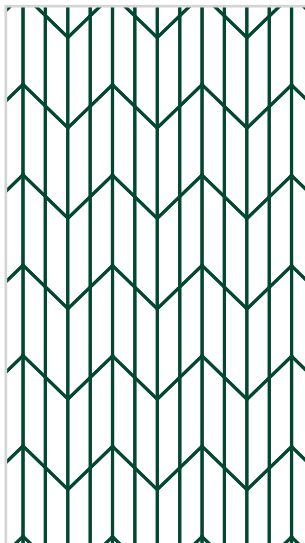


Chevron 60°

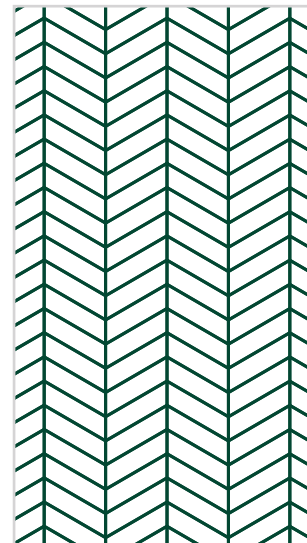

**THICKNESS**  
raw/finished



**WIDTH**



**LENGTH**

**Chevron 45°  
Chevron 60°  
- Oak**

16 -15 mm /  
21 - 20 mm

70 mm

500 / 600 / 800 mm

100 mm

600 / 700 / 800 / 1,000 mm

130 mm

600 / 700 / 800 / 1,000 mm

150 mm

800 / 1,000 mm

180 mm

1,000 / 1,200 mm

70 mm

500 / 600 / 800 mm

100 mm

600 / 700 mm

130 mm

600 / 700 mm

150 mm

800 mm

**Chevron 45°  
Chevron 60°  
- Oak for heating floors**

16 -15 mm










# Decorative patterns

In our region, we are leaders in the production of decorative solid wood floors. To create patterns, we use both native wood species and exotic varieties. Utilizing proprietary technology and machines designed specifically for this purpose, we create compositions joined with our tongue-and-groove. In our standard offer, we have several types of the most frequently chosen patterns.

However, we are not limited to rigid schemes and are open to new ideas from our customers. In cooperation with the customer, we are happy to refine an individual project, select the best types of wood, adjust the dimensions of individual elements, and develop installation instructions.

This offer is aimed at the most demanding customers who want to emphasize their individuality and originality through the floor, while also valuing sophisticated elegance and warmth and nature in their interiors.

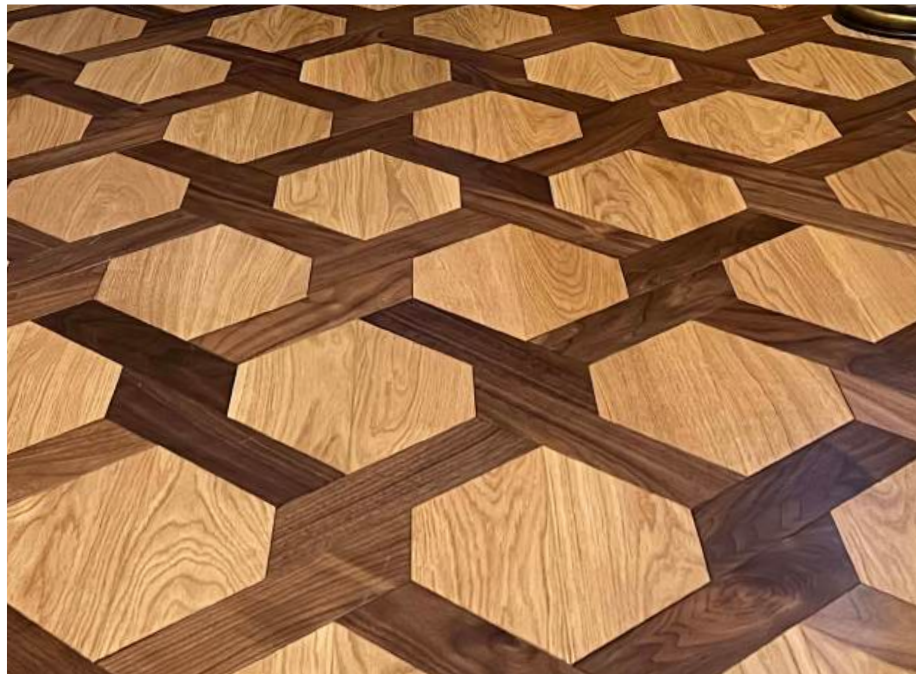





Manhattan

Słowiczyński BIS



Florence

French Square





Versailles

Little Versailles



English

Słowiczyński




# Care for Oiled Floors

In case of oiled floors, it is best to remove daily dirt with a vacuum cleaner equipped with a soft brush. Sand grains can scratch the coating and accelerate its wear. For regular wet cleaning, Osmo Wisch-fix is recommended. It should be used according to the label instructions, as it extends the durability of the wax coating.

Oiled floors should be periodically maintained to prevent the wax barrier from wearing out. This barrier protects the wood from dirt, liquid penetration, and creates a smooth, touchable surface while enhancing the color.

Maintenance should be carried out on average every 6 months to 3 years, depending on usage intensity. To perform maintenance independently, vacuum the floor and wash it with Osmo Wisch-fix.

After it has completely dried, use a cloth or flat mop to apply Osmo 3029 maintenance product along the grain. Professional maintenance services are also available, offering additional benefits such as cleaning with an industrial floor scrubber and machine application of factory oil wax for increased durability.

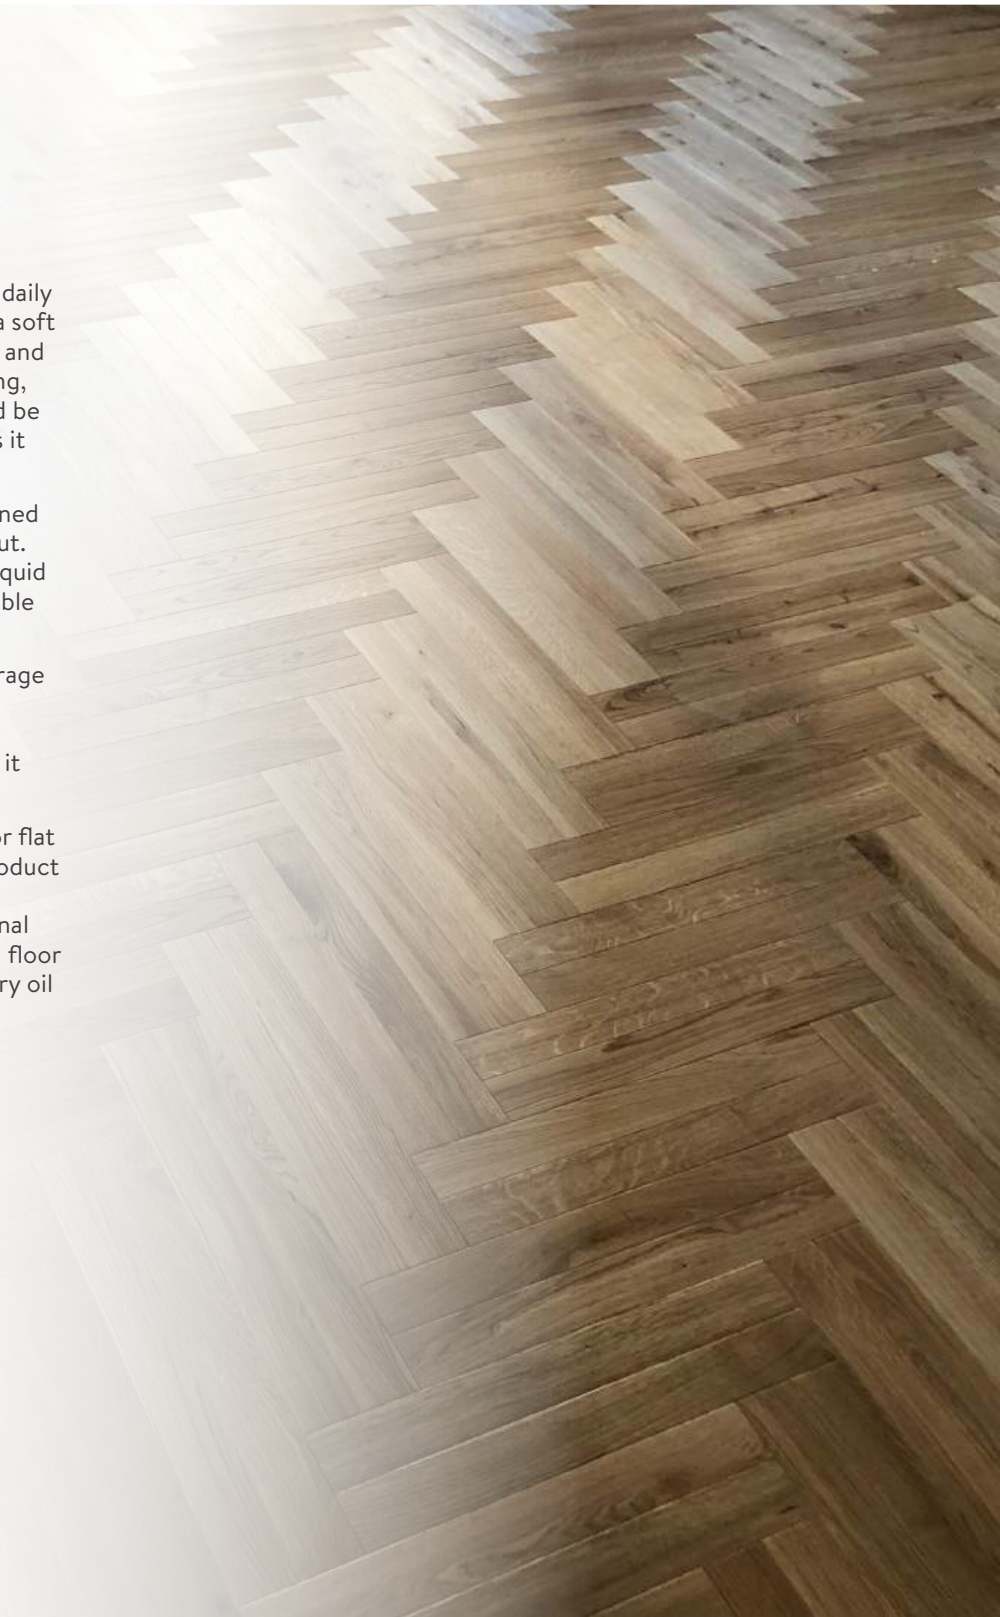

## Care for Lacquered Floors

Owners of lacquered floors are advised to remove daily dirt with a vacuum cleaner equipped with a soft brush to maintain a smooth, pleasant-to-touch surface for as long as possible.

To ensure the varnish's longevity at its best, the use of **Flooria Daily Cleaner** is recommended. Dilute it according to the label instructions and wash the floor using a flat mop.

It is important to ensure the mop is well wrung out to avoid applying too much water. For periodic maintenance of the varnish **Flooria Care Balm** is preferred.





**Parkiety Jabłoński Sp. z o.o.**

Tchórznica Włociańska 59  
08-331 Sabnie

POLAND

+48 500 101 443

+48 25 787 46 70

[handlowy@parkietyjablonski.pl](mailto:handlowy@parkietyjablonski.pl)

[www.ParkietyJablonski.pl](http://www.ParkietyJablonski.pl)

